

Vexve Termomix D


Cast iron 3-way mixing valve boiler mounted

Function:	Used as a 3-way mixing valve in heating and cooling systems
Turning direction:	Changeable without tools - also under pressure
Connections:	Female thread DN 20, 25, 32, 40 and 50
Motorisation:	Standard four-point attachment
Suitable actuators:	For example Belimo, Ouman, Seltron, Evenes, Automix, Vexve, ESBE
Maintenance:	Maintenance-free – O-rings, stem, cover and closure replaceable




Properties

Body:	Cast iron
Sleeve & shaft:	Brass
Cover:	Aluminium
Handle:	POM
O-rings:	EPDM
Medium:	Water, glycol
Maximum working pressure:	10 bar
Operating temperature:	0 °C – +120 °C
Torque:	< 1 Nm
Turning angle:	90-degrees

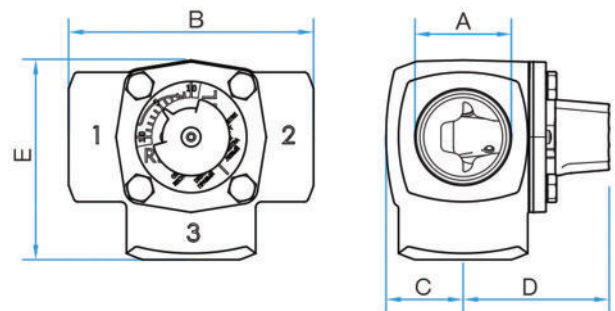

Valve selection chart

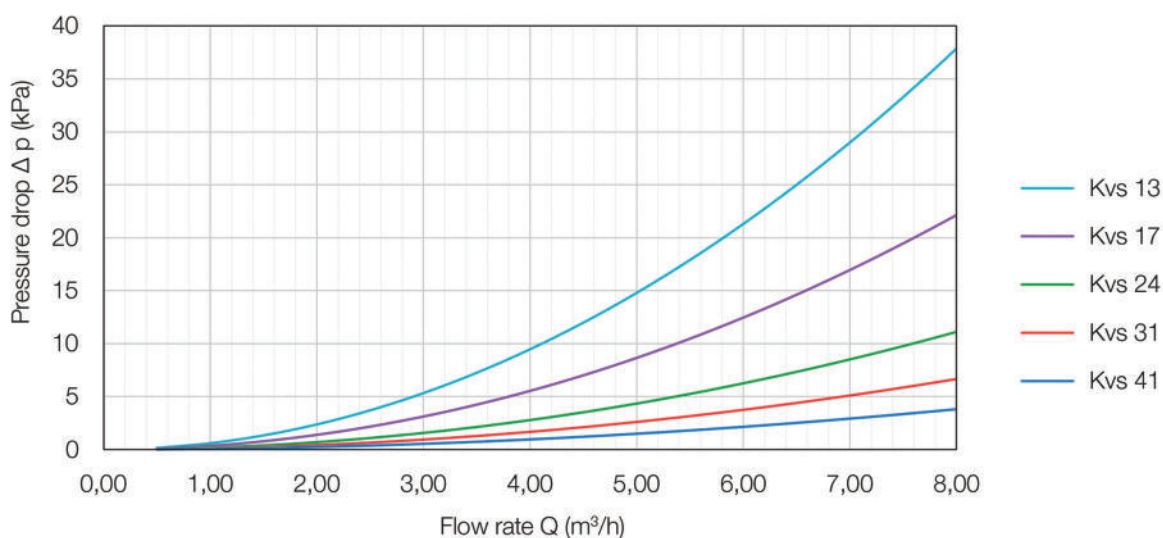

Vexve Termomix D

Cast iron 3-way mixing valve boiler mounted

Female thread

Item	Product number	HPAC code	RSK code	EAN	Kvs	A	B mm	C mm	D mm	E mm	kg
Termomix D 20	1660000	4023072	4905075	641873 312320 2	13	20 - Rp ¾"	110	32	67	92	1,7
Termomix D 25	1660002	4023073	4905076	641873 312325 7	17	25 - Rp 1"	112	32	67	94	1,8
Termomix D 32	1660004	4023074	4905077	641873 312332 5	24	32 - Rp 1 ¼"	127	36	70	100	2,4
Termomix D 40	1660006	4023075	4905078	641873 312340 0	31	40 - Rp 1 ½"	127	40	73	101	2,7
Termomix D 50	1660008	4023076	4905079	641873 312350 9	41	50 - Rp 2"	135	48	80	105	4,1

Vexve Termomix A/C/D

3- ja 4-tie jako- ja sekoitusventtiilit
3- und 4-wege verteiler- und mischventile
3 and 4-way distribution and mixing valves

3 och 4-vägs fördelnings- och shuntventiler
Vannes de distribution et mélangeuses 3 et 4 voies
3 и 4-х поточные распределительные и смесительные клапаны

